

Installing


1. Power Supply

This unit accepts DC5V to 24V power supply. The red cable should be connected to positive and black cable to negative. Please select proper power supply according to the LED application.

2. LED Output

The red cable should be connected to LED positive and black cable to negative. The peak output current is 12A, please reduce load if main unit is overheating.

Caution! Do not short circuit the LED output, this may lead to permanent damage!

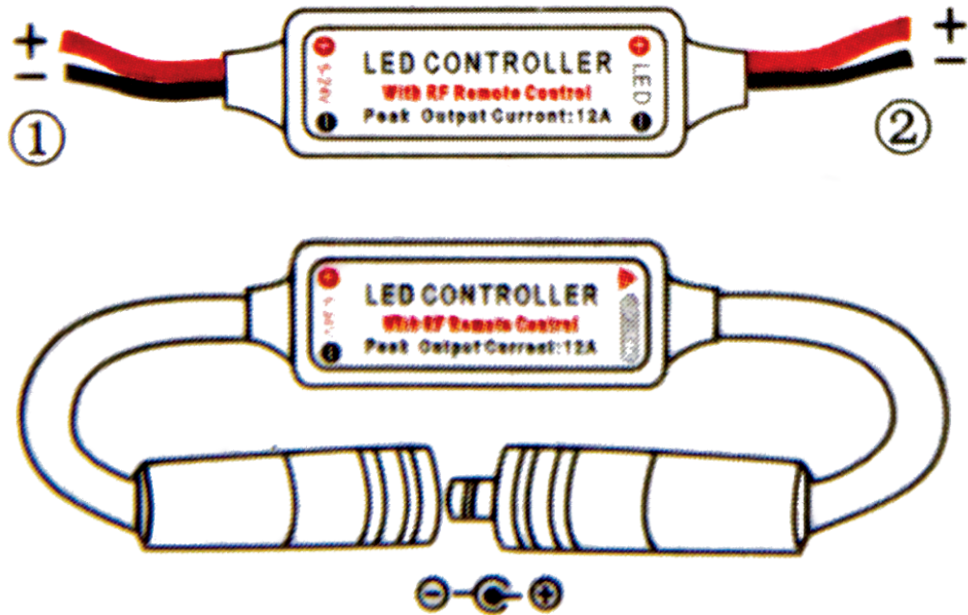

TRUCKSTYLER

3. Remote Control

Please pull out the insulate part before using. The RF wireless remote signal can pass through barrier, so it's not necessary to aim at the main unit when operate. For proper receiving remote signal, do not install the main unit in closed metal parts. The remote battery is 3V CR2025 type, please only replace with same type battery.

SPECIFICATION

Dynamic Mode	8 modes
Dynamic Speed level	10 levels
Lighting brightness level	10 levels
PWM grade	256 grades
Smooth dimmer effect	Yes
Working voltage	DC 5V-24V
Output current	peak 12A
Remote control mode	RF Wireless
Remote frequency	433.92 MHz
Remote distance	>30 m at open area