

VISION X TEST REPORT

Test Standard : CISPR 25 Edition 3.0 (2008-03)
Test Item : XPR-12M

CISPR 25 Edition 3.0 (2008-03) tests of XPR-12M

Report No. CP-20150323-02

Test Period 23 MAR, 2015

Client N/A

Contract person Ms. Soo Ryou

E-mail : info@visionxasia.com

Test Specimen One unit manufactured on 20 MAR 2015

designation : XPR-12M

Type : LED BAR LIGHTS

Serial No# N/A (from Pre Production Lot)

Temp / Humid / Pressure : +22~23 °C / 34%RH / 86-103kPa

Test Condition Operating Mode : Lighting mode

Power supply : DC 24V (Car battery / Model NO. CMF100L)

Conducted Emissions

Definition :

The test assesses the ability of the EUT to limit its internal noise from being present on the AC mains Power In/Output/Telecommunication ports.

Test Report

Test Method : CISPR 25 Edition 3.0 (2008-03) CLASS 3

Measurement Frequency range : 150 kHz ~ 108 MHz

Measurement RBW : 9 kHz @ Below 30 MHz / 12 0KHz@above 30 MHz

Test Mode : Lighting mode

Result : Complies

Measurement Data

-Refer to the next Page (Maximum emission configuration)

-No other emissions were detected at a level greater than 20 dB below limit

A sample calculation :

COR. F (correction factor)= LISN insertion loss + Cable loss

Emission Level = meter reading + COR.F


Test Personnel

Vision X Asia
Engineer JS LEE

Date


23 MAR, 2015

Authorized
Signature




President / Vision X Asia

Documentation

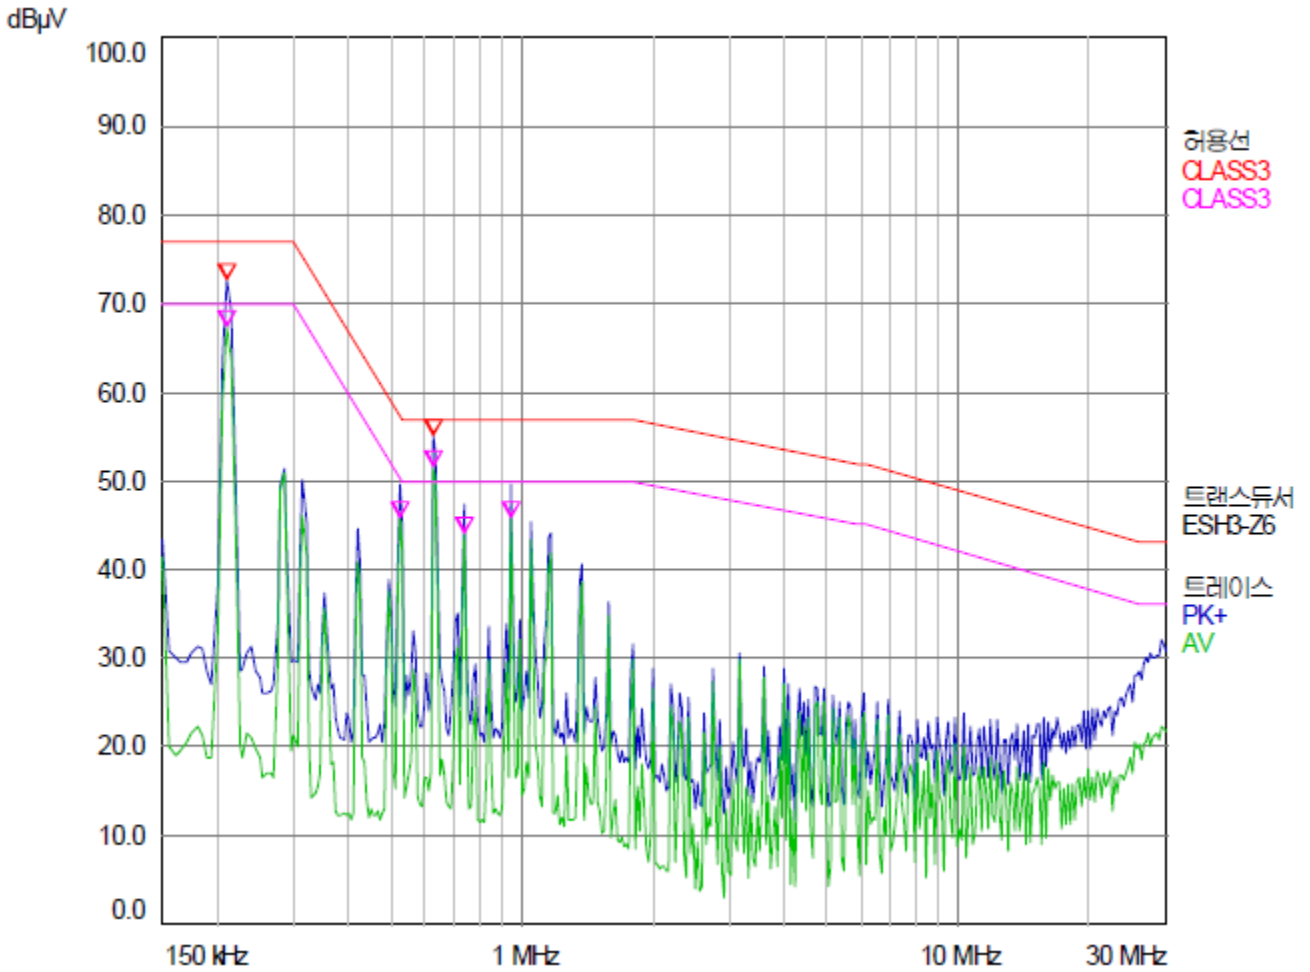

Documentation

Test Specimen

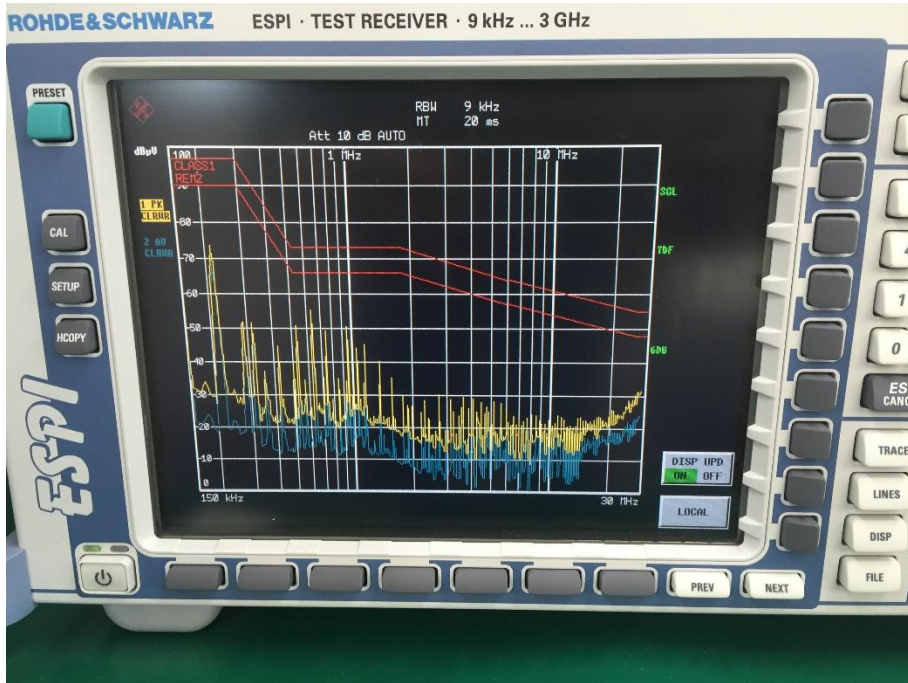

www.visionxasia.com

Test Facility

